


TRIPLETEx[®]

		Test Standard
Material	Thermoplastic Polyurethane-Ester based	
hardness	86+-3 ShoreA	ASTM D2240
Density	1.2g/cm ³	ASTM D297
Stretch before tearing	>200%	ASTM D412
Tearing strength	115kg/cm	ASTM D1004
Thickness	0.04mm	
Water vapor permeability	1200-1500g/sqm/24hrs	ASTM E96 BW
Waterpillar	> 10,000mm	JIS 1092
Shrinkage in hot air	185-205°C	

TRIPLETEx[®]

water.winter.wind

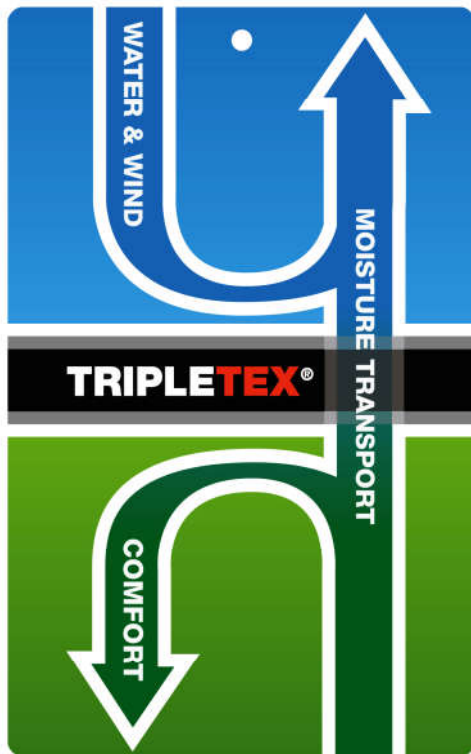

TRIPLETEx[®]

TRIPLETEx[®] keep the foot dry and comfortable with its advanced moisture-transport capabilities.

WATERPROOF WINDPROOF BREATHABLE

- NON CLAMMINESS
- BREATHABLE
- NON DETERIORATION
- QUICK DRYING

TRIPLETEx[®] BY GREEN MOUNTAIN